

3" Radiance™ LED Overhead Light

Features:

- Illuminated with 9 LEDs with an option of standard or high lumen output
- Available in 3000K, 3500K or 4000K color temperatures
- Air flow vents added to dissipate heat
- Polycarbonate lens provides the appearance of frosted glass while offering maximum light output and a soft diffused glow
- Available with or without an integral on/off switch
- Surface mount requires no installation cutout
- Wiring moved to center of the light to simplify installation
- Excellent thermal management for a long 50,000 hour estimated LED life
- **MacAdam Ellipse** color control technology: color difference between fixtures guaranteed to be undetectable to the human eye.

Product Details

	Standard Output	High Output
Lens	Polycarbonate	
Wattage	2.3 W	2.8 W
Voltage:	12V DC	
Amp Draw: [@13.6V DC]	0.17 A	0.20 A
Lumen Output	150 LM	224 LM
Color Temperature	3000K, 3500K or 4000K	

Specification Guide


Sample Part #: 69453CUSM-01-0030

Base Part
 Lens Material
 Switch Option
 Mounting Style
 Number or Type of LEDs
 Color Temperature

3" Radiance Specifications

Base Part #	Lens Material	Switch Option	Mounting Style	Type of LEDs	Color Temperature
69453	C - Polycarbonate	U - Unswitch S - Switched	SM - Surface Mount	01 - Standard 02 - High	0030 - 3000K 0035 - 3500K 0040 - 4000K

Product Dimensions:

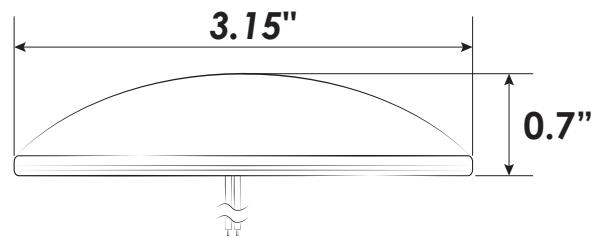

3" Radiance™ LED Overhead Light Improvement Sheet

