

VersiControl™ RGBW Signal Amplifier

Features

- The signal amplifier provides an additional power input that helps maintain the RGBW signal over long runs and prevents dimming or sync issues with other RGBW zones.
- ITC recommends an amplifier when running 90% of full load with 14 gauge wire and at lengths of 20' or more.
- Lights cannot be daisy chained but can be run in parallel as long as the amperage is not exceeded on the amplifier.


Product Details

Housing	Aluminum
Input Voltage	12-24V DC
Current	24A Max* 6A Max per RGB Wire
Over Current Protection	20A In-line Fuse
IP Rating	IP66
Protection	Over Current on Input Power Lines
Operating Temp.	-20°C to 60°C


Compatible with all ITC Versicolor™ Products




Part Number: 21081-24-01

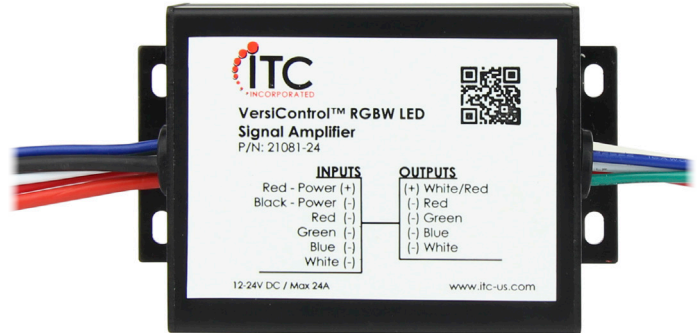

Product Dimensions

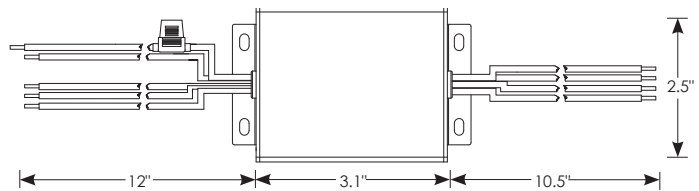

Top View

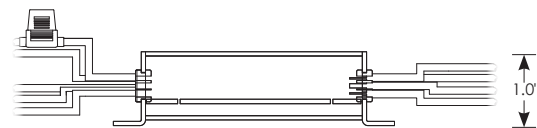

Side View