

## PARTS / TOOLS NEEDED:

			Application Specific Sealant	
Flex Light & Mounting Clips	Power Drill (not provided)	#6 pan head screws (not provided)	(not provided)	Butt Splices (not provided)

### Safety Instructions

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Do not install any luminaire assembly closer than 6" from any combustible materials.


### Installation Considerations For All Flexible Lighting Products

- Do not bend lighting more than necessary. Refer to page two for bend radius minimums.
- Only bend the LED ribbon in one natural direction, do not try to bend in an unnatural direction such as twisting.

### \*\*Installation Considerations For H Flexible Lighting

- Unroll the entire length of HMTL before installing.
- Start installation at the wire lead end.
- When installing the light on the mounting surface, make sure to push towards the wired end.
- Do not use any roller as that may cause damage to the LED circuit.

**1.** Determine installation location and drill a hole in the mounting surface.

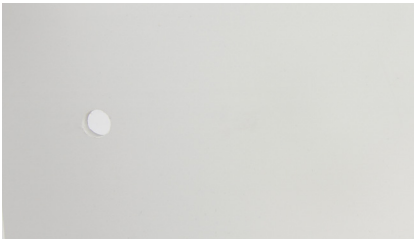


**2.** Secure clips to mounting surface using #6 pan head screws (not provided).



*\*Clip spacing is dependant on application, when going around curves clip spacing should be closer.*

**3.** Feed the wires into the hole and apply application specific sealant\* around the hole and wires.

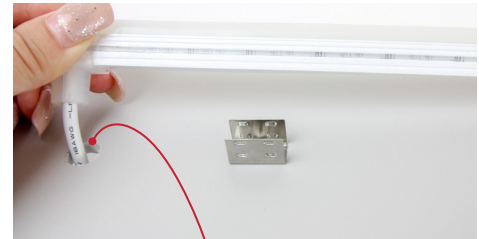


*\*Sealant here*

**4.** Secure the light in the track by gently pushing into clips



**5.** Follow the wiring diagram below to wire the light to your system.

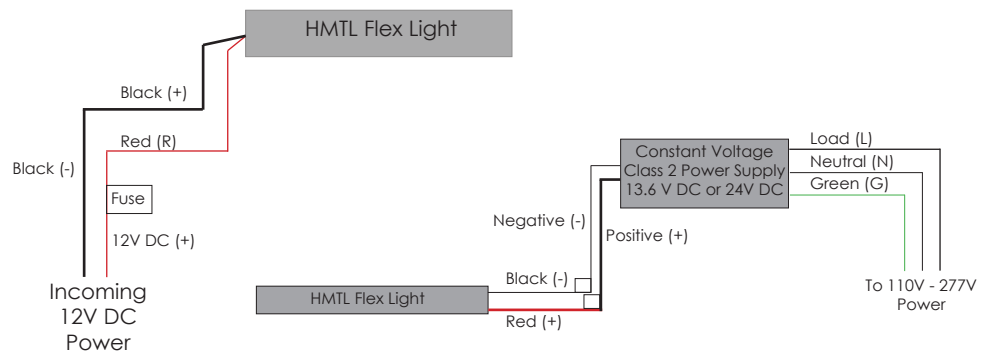

*\*Please review the considerations on page 2 to ensure a successful installation.*

**\*HMTL flexible lighting cannot be field cut. Field cutting the light will void the warranty.**


# CAUTION

## INSTALLATION INSTRUCTION


ALWAYS INSTALL WIRE END FIRST!

### MINIMUM BEND RADIUS

LATERAL BEND

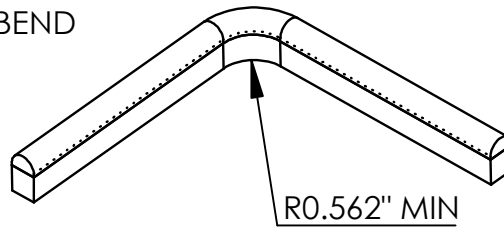

TOP TO BOTTOM BEND

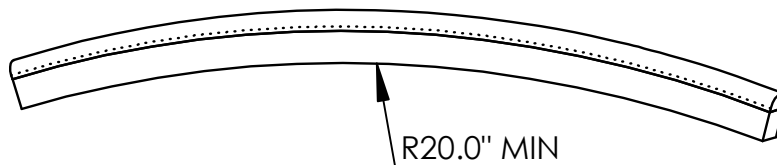

Do not twist tapelight