

Wander™

Horizontal Bend Diffused Flexible LED Light

Part #: HMTL12KK-LLLWL-10-XX

Features


- Bottom wire exit provides a clean, seamless installation with no visible wires.
- Available in multiple colors including, 3000K, 4000K or 6500K. Contact sales for additional non-stock standard color options.
- Electronics design ensures even light output from beginning of the strip to the end of the strip with minimal drop in output.
- The horizontal bend radius allows for installation around curved ceilings and signage.



Product Details

Dimensions	0.40" W x 0.72" H x Various L
Housing	Silicone
Wattage	2.5 W/Ft
Voltage	12V DC
Current	0.18 Amp/Ft
Lumens [Averaged over 30 ft]	92 Lumens/Ft @ 4000K 17 Lumens/Ft @ Blue
Kelvin*	3000K, 4000K or 6500K
CRI	80+
Efficacy	45 Lm/W
Cut Increment [cannot be cut in field]	≈ 1"
LED Count	47 per foot
IP Rating	IP66
Operating Temp.	-4°F to +140°F (-20°C to +60°C)
* Contact sales for additional color options / **Kelvin colors shown account for the color shift experienced by the diffused silicone sleeve	

Product Dimensions

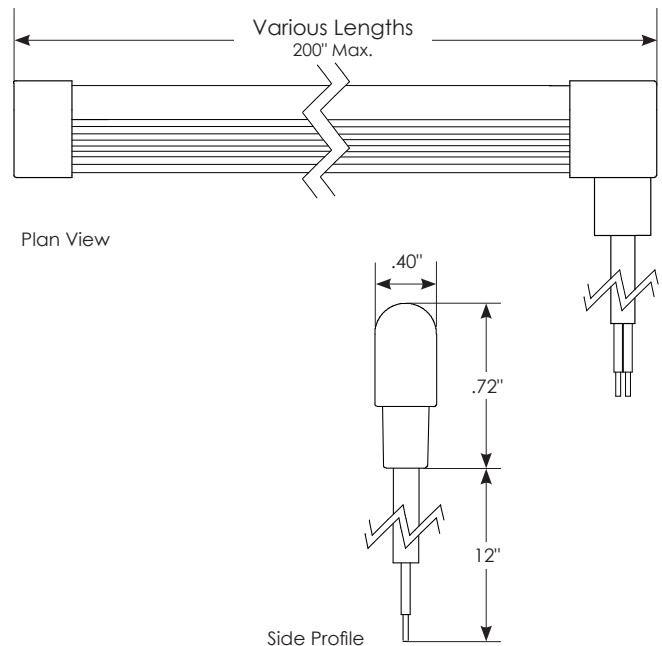

Specification Guide:

Sample Part #: HMTL1230-20012-10-BW

Base Part #.....
 Voltage.....
 Color Temp (KK).....
 Light Length (LLL).....
 Wire Length (WL).....
 Light Width.....
 Wire Exit (XX).....

Base Part #	Voltage	Color Temp. (KK)	Light Length (LLL)	Wire Length (WL)	Light Width	Wire Exit (XX)
HMTL	12 - 12V	30 - 3000K 40 - 4000K 65 - 6500K	200 - 200 in. Max Length cuts every ≈1"	12 - 12 in.	10 - 10mm (0.40 in.)	BW - Bottom Wire Exit
Note: Contact sales for info on available color temperatures and cut lengths. Cannot be field cut.						

Accessory Specification

Mounting Clips	Part #
Mounting Clip - Qty 1 (recommend one clip every 12")	150-00251
Mounting Clip Kit - Qty 12	800-00218



Mounting Channel	Part #
72" Plastic Extruded Channel Screw Mount White	HMTL10-72-WH
72" Plastic Extruded Channel Screw Mount Black	HMTL10-72-BK

